

# HP Type Sealed Lead-Acid Battery

# HP 24-12


## ● Specification & Characteristics

Model		HP24 - 12 (12M24)*
Nominal voltage		12 V
Rated capacity		24 Ah/20 HR
Dimensions	Container Height	125mm (4.92 inches)
	Length	166mm (6.54 inches)
	Width	175mm (6.89 inches)
Weight		Approx. 9.0kg (19.9 lbs.)
Capacity 25°C (77°F)	20HR 1.2 A	24 Ah
	5HR 4.1 A	20 Ah
	1HR 14 A	14 Ah
	1C 24 A	12 Ah
Internal resistance		Approx. 10mΩ
Max. Discharge current		360 A (5 sec)
Charging voltage 25°C (77°F)	Standby use	13.5 to 13.8V (-20mV/°C)
	Cycle use	14.4 to 15.0V (-30mV/°C)
Max. Charging current		7.2 A




\*The model number in bracket is an indication in accordance with Japanese Industrial Standard (JIS C 8702)


Discharge characteristics(25°C(77°F))

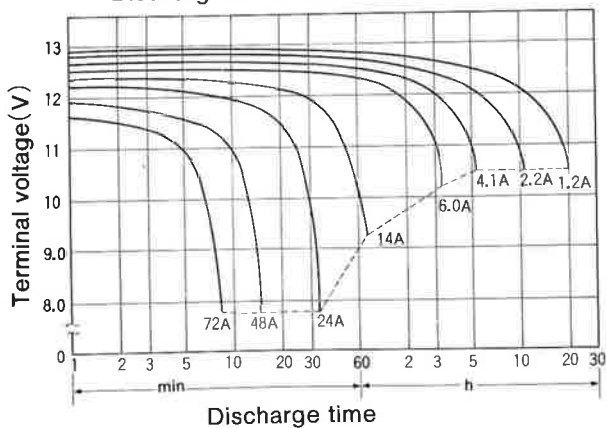

Discharge characteristics(0°C(32°F))

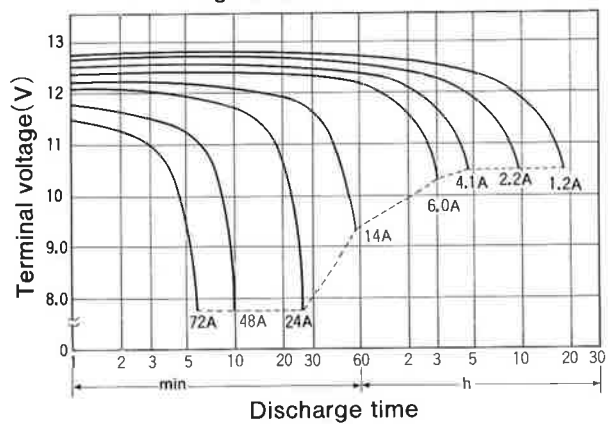

## ● Dimensions

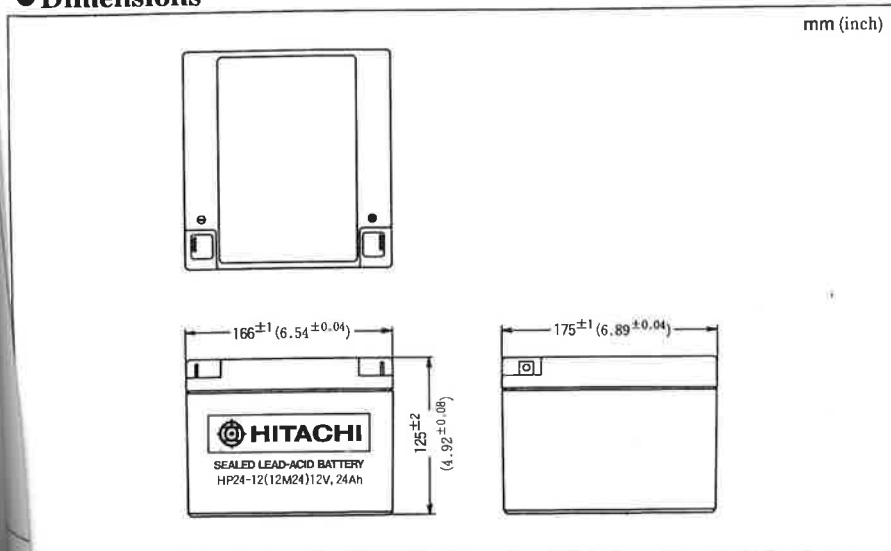

## ● Terminal

